Preliminary Surface Energy Budget Measurements from Nauru99

C. W. Fairall, J. E. Hare, A. A. Grachev, and A. B. White National Oceanic and Atmospheric Administration Environmental Technology Laboratory Boulder, Colorado

Introduction

The National Oceanic and Atmospheric Administration (NOAA) research vessel (R/V) Ronald H. Brown conducted a series of measurements in transit to and in the vicinity of the U.S. Department of Energy (DOE) Cloud and Radiation Testbed (CART) site on Nauru in June-July 1999 as part of a joint NOAA-Atmospheric Radiation Measurement (ARM) Program intensive study of air-sea interaction and cloud/radiative processes in the tropical western Pacific. This cruise, which has been designated Nauru99, was a follow-up to an earlier study at Manus Island (Post et al. 1997). Also participating in this study were the Japanese R/V Mirai, the Flinders University research aircraft, and a host of investigators at the ARM Tropical Western Pacific (TWP) site on Nauru. See <u>http://www.etl.noaa.gov/nauru99/</u> and associated links for more detail.

The ARM effort on R/V Ronald H. Brown for Nauru99 featured an ensemble of instruments to make measurements in the ocean and atmosphere with a combination of in situ and remote sensing methods. On the atmospheric and near-surface ocean side, measurements included Global Positioning System (GPS) rawinsondes, bulk near-surface meteorology, air-sea turbulent fluxes, radiative fluxes, numerous raingages, three profiling Doppler radars, microwave and infrared (IR) radiometers, a cloud ceilometer, and a scanning C-band Doppler precipitation radar.

In this paper, we will focus on one set of measurements made with NOAA's Environmental Technology Laboratory (ETL) air-sea flux system including preliminary calculations of various terms (sensible, latent, and cool-rain heat fluxes plus net solar and IR radiative fluxes) of the surface energy budget. Cruise averages will be compared with previous (and a few subsequent) ETL cruises in the tropics.

ETL Flux Measurement Systems

The ETL ship-based air-sea interaction system was used for bulk meteorology, radiative, and turbulent flux measurements with additional measurements provided by the ship's operational instruments. The majority of the sensors were mounted on a scaffold unit just aft of the bow; the turbulence sensors were mounted on a forward-facing boom on the ship's jackstaff at the most forward and best exposed location on the ship (Figure 1). The ETL measurement system is described in detail by Fairall et al. (1997). A sonic anemometer/thermometer is used to make turbulent measurements of stress and buoyancy flux; a high-speed infrared hygrometer is used with the sonic velocity data to obtain latent heat flux. An inertial



Figure 1. View of R/V Ronald H. Brown showing flux instruments on the bow tower and jackstaff. The large white sphere is the C-band Doppler radar.

navigation system is used to correct for ship motions (Edson et al. 1997). Fluxes are computed using covariance, inertial-dissipation, and bulk techniques (Fairall et al. 1996). Sea-surface temperature is derived from bulk water measurements at a depth of 5 cm with a floating thermistor. Mean air temperature and humidity are derived from a conventional aspirated T/RH (temperature/relative humidity) sensor; the IR hygrometer provided redundant information. Cloud information is obtained from a commercial lidar ceilometer with a vertical resolution of 35 m and a maximum range of 7.8 km.

Air-Sea Flux Results

The ship departed Darwin, Australia, on June 15, arriving at a TAO (Tropical Atmosphere Ocean) buoy at 2 S 165 W (Figure 2) on June 23. After one week on station, it then departed, reaching Nauru Island the next day where it remained for another two weeks. Figure 3 shows the daily averages of the main components of the net heat flux to the ocean

$$H_{net} = R_{ns} + R_{nl} + H_s + H_l + H_{rain} = R_{ns} + R_{nl} + H_T$$
(1)

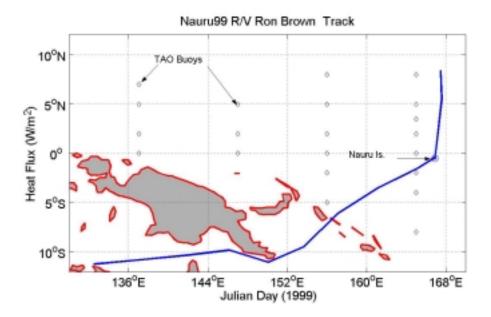


Figure 2. Cruise track of R/V Ronald H. Brown during Nauru99. The diamonds are TAO buoy locations.

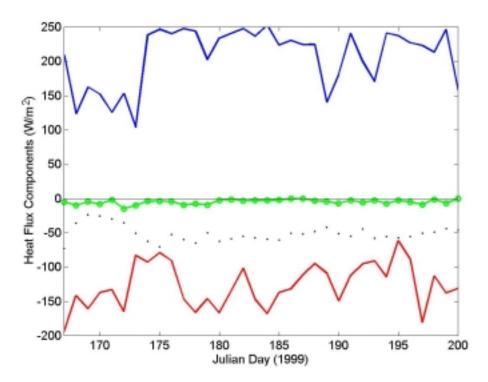


Figure 3. Time series of daily averaged flux components: sensible heat flux (green circles), latent heat flux (red line), net solar flux (blue line), and net IR flux (black dots).

where R_{ns} is the net solar radiative flux, R_{nl} the net longwave radiative flux, H_s the sensible heat flux, H_l the latent heat flux, and H_{rain} (not shown) the heat flux carried by precipitation. A positive value implies the flux warms the ocean. The solar flux is balanced primarily by evaporation and net IR cooling. Figure 4 shows the time series of daily average rainfall; disturbed (deep convection) periods are apparent as spikes in the rainfall. In undisturbed periods, the ocean warms by about 100 W/m², while in disturbed conditions it cools by about 100 W/m². The cooling in disturbed conditions is a combination of cloud radiative forcing and stronger winds that increase evaporative cooling. The ship reached Nauru on day 182 but only experienced a few days of convective activity at that location. A sample of flux component time series at higher time resolution is shown in Figure 5. These data were taken while the ship was in the vicinity of the TAO buoy at 2 S 165 E. Winds were very light the first two days, then began to pick up in association with a mild disturbance that went through on day 178.

Cruise averages and the 10-cruise standard deviation for surface flux components are given in Table 1 along with results from other tropical cruises made by ETL. The earlier 6-cruise average includes three cruise legs from Tropical Ocean Global Atmosphere-Coupled Ocean Atmosphere Response Experiment (TOGA-COARE), the COARE Pilot, Tropical Instability Wave Experiment (TIWE), and Combined Sensor Program (CSP) cruises. While precipitation was low for Nauru99 (about one-third average) presumably because of the strong La Niña, the mean low cloud fraction (0.27) was fairly typical and average flux components were similar to past cruises. However, surface cloud radiative forcing for solar flux was only 40W/m², significantly less than the 70 W/m² that is typical.

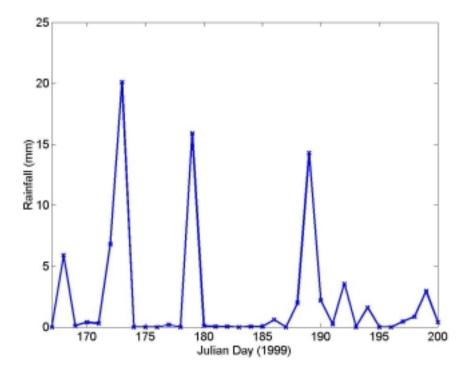


Figure 4. Time series of daily averaged rainfall (mm).

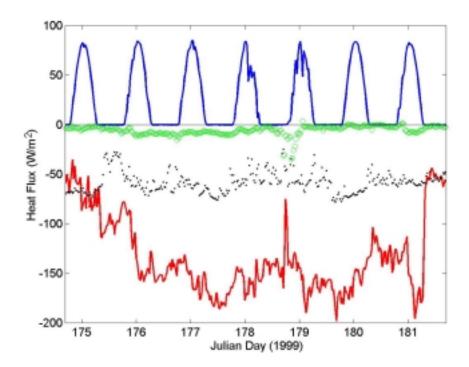


Figure 5. Time series of flux components while on station near the TAO buoy at 2 S and 165 W: sensible heat flux (green circles), latent heat flux (red line), net solar flux divided by 10 (blue line), and net IR flux (black dots).

Table 1. Sea-air surface flux components in the tropics [W/m ²]; variables defined in text.							
Experiment	R _{ns}	R _{nl}	H _s	Hı	H _{rain}	H _T	H _{net}
Earlier 6-Cruise Average	204	-49	-8	-107	-2.0	-120	35
JASMINE	205	-43	-9	-125	-1.9	-135	27
NAURU99	216	-54	-5	-123	5	-129	33
KWAJEX-1	220	-47	-7	-95	-2.5	-105	69
KWAJEX-2	214	-44	-8	-102	-2.9	-113	57
$\sigma_{\rm X}$ (10-cruise std)	18	5	2.5	11	1.1	12	26
JASMINE - Joint Air-Sea Monsoon Interaction Experiment KWAJEX - Kwajalein Experiment							

Corresponding Author

C. W. Fairall, NOAA R/ETL7, 325 Broadway, Boulder, CO 80303, 303-497-3253, cfairall@etl.noaa.gov

References

Edson, J. B., A. A. Hinton, K. E. Prada, J. E. Hare, and C. W. Fairall, 1997: Direct covariance flux estimates from moving platforms at sea. *J. Atmos. Oceanic Tech.*, **15**, 547-562.

Fairall, C. W., E. F. Bradley, D. P. Rogers, J. B. Edson, and G. S. Young, 1996: Bulk parameterization of air-sea fluxes in TOGA COARE. *J. Geophys. Res.*, **101**, 3747-3767.

Fairall, C. W., A. B. White, J. B. Edson, and J. E. Hare, 1997: Integrated shipboard measurements of the marine boundary layer. *J. Atmos. Oceanic Tech.*, **14**, 338-359.

Post, M. J., C. W. Fairall, J. B. Snider, Y. Han, A. B. White, W. L. Ecklund, K. M. Weickmann, P. K. Quinn, D. I. Cooper, S. M. Sekelsky, R. E. MacIntosh, P. Minnett, and R. O. Knuteson, 1997: The Combined Sensor Program: An air-sea interaction science mission in the central and western Pacific Ocean. *Bull. Am. Met. Soc.*, **78**, 2797-2815.